
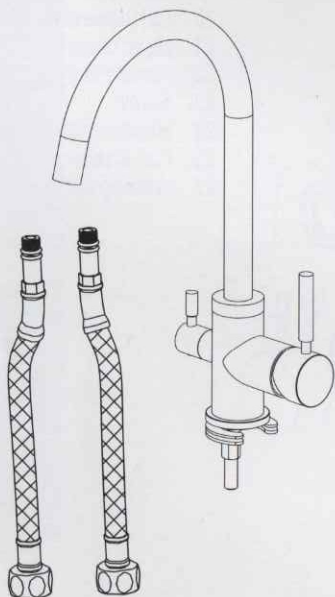


Installation Instruction


Three Flow Kitchen Faucet

Before your installation

please check to make sure you have the following parts indicated below

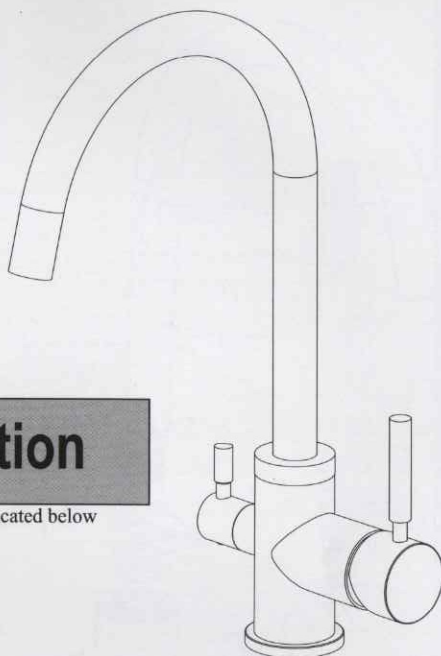

Tools you will need



Allen wrench (2.5mm)




Pipe tape



Monkey wrench

Replacement parts

Keep this manual for ordering replacement parts

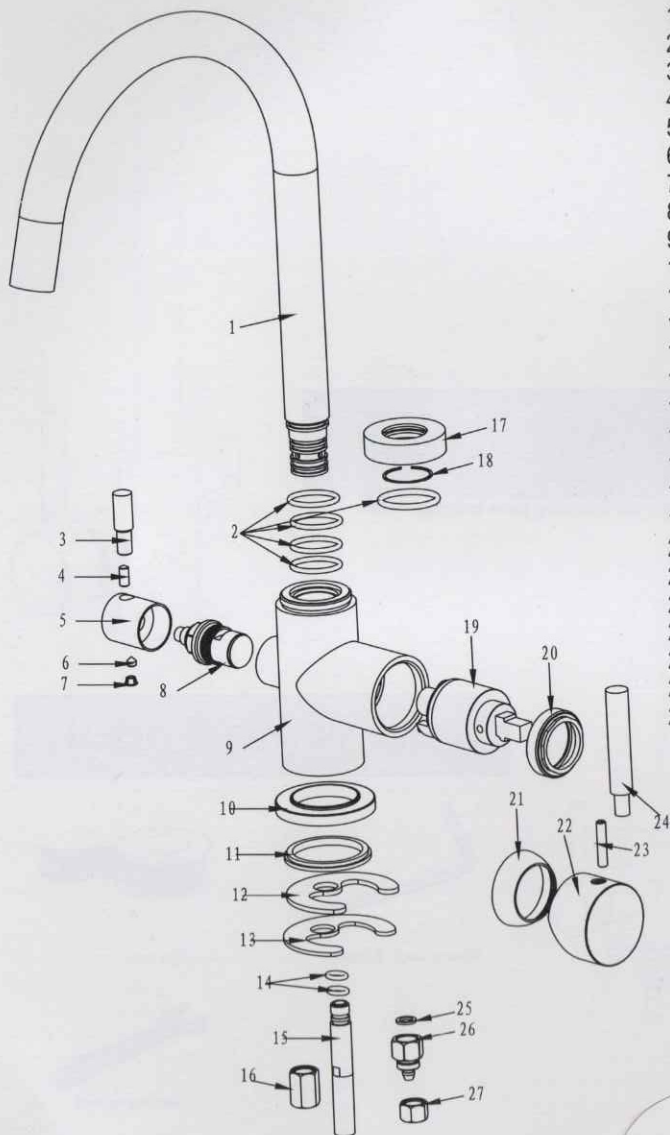

- | NO | NAME |
|-----|------------------------|
| 1. | Spout assembly |
| 2. | O-ring |
| 3. | Handle knob |
| 4. | Screw |
| 5. | Handle |
| 6. | Locking screw |
| 7. | Handle plugs |
| 8. | Cartridge |
| 9. | Faucet body |
| 10. | Index |
| 11. | Rubber pad |
| 12. | Rubber pad |
| 13. | Stainless steel gasket |
| 14. | O-ring |
| 15. | Inlet pipe |
| 16. | Nut |
| 17. | Copper sleeve |
| 18. | Gasket |
| 19. | Cartridge |
| 20. | Cartridge platen |
| 21. | Head cover |
| 22. | Handle body |
| 23. | Screw |
| 24. | Handle knob |
| 26. | Flat washers |
| 27. | Locking nut |

380 (14.96'')

252 (9.92'')

204 (8.03'')

90°

45°

$\phi 24$ (0.94'')

$\phi 44$ (1.73'')

$\phi 54$ (2.13'')


107 (4.21'')

90°


This outlet pipe assembly can be rotated 360 degrees

This outlet pipe assembly can be rotated 360 degrees


Faucet Installation Procedures

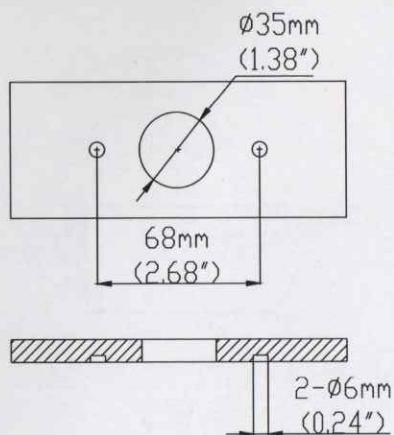


Step ①

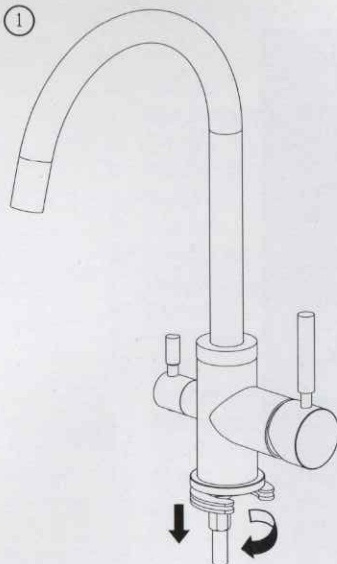


Step ②

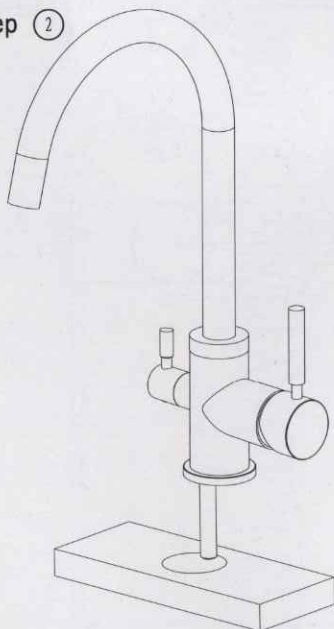


Step ③

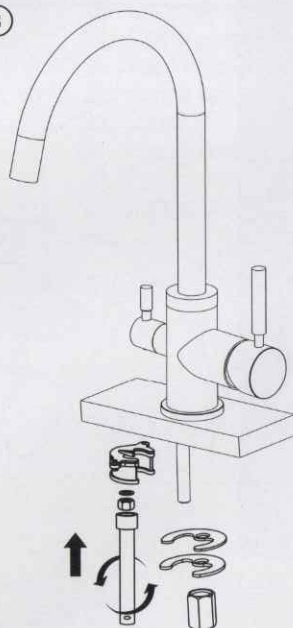


Step ④

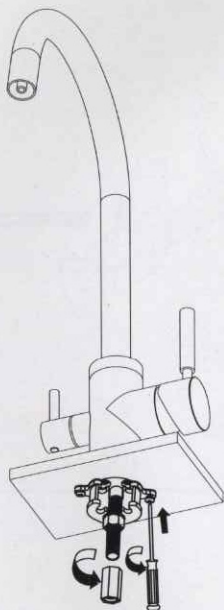



Step ⑤

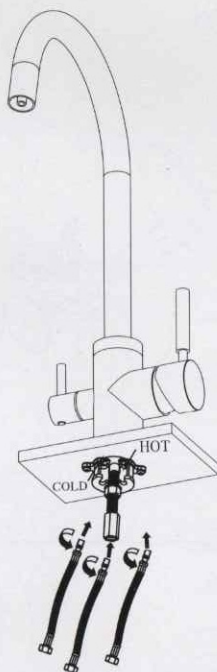




Step ⑥

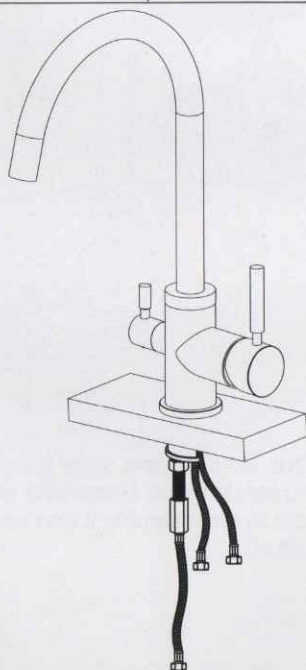

Step ⑦

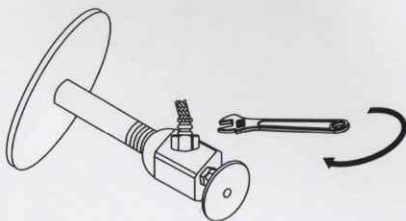


Step ⑧

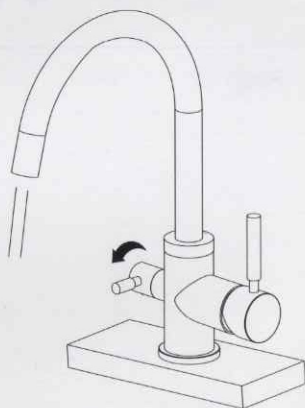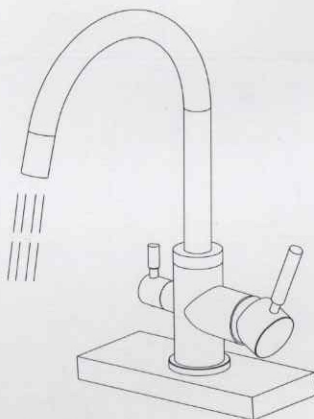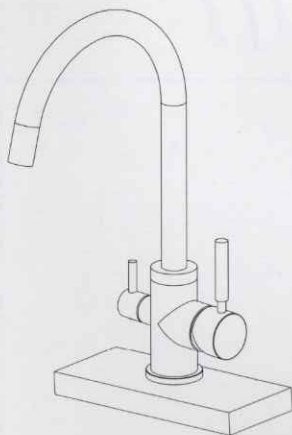


Notice:

Please removing all of the sand,silt and other things from the water hose before assembling,to avoid blocking the faucet and effecting water rate.
Please use the special tools to disassemble it and wash with pneumatic equipment,ifthe faucet blocked.

Step ⑨

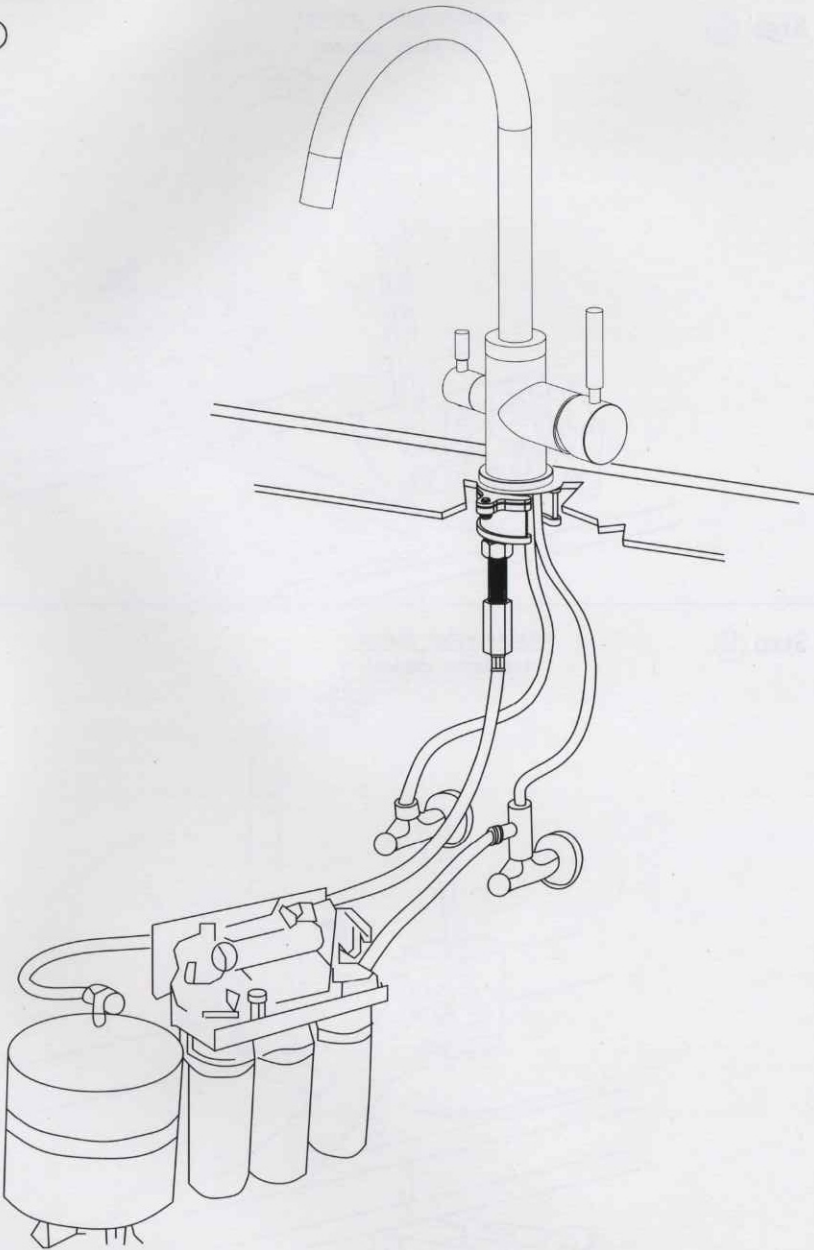

Step ⑩

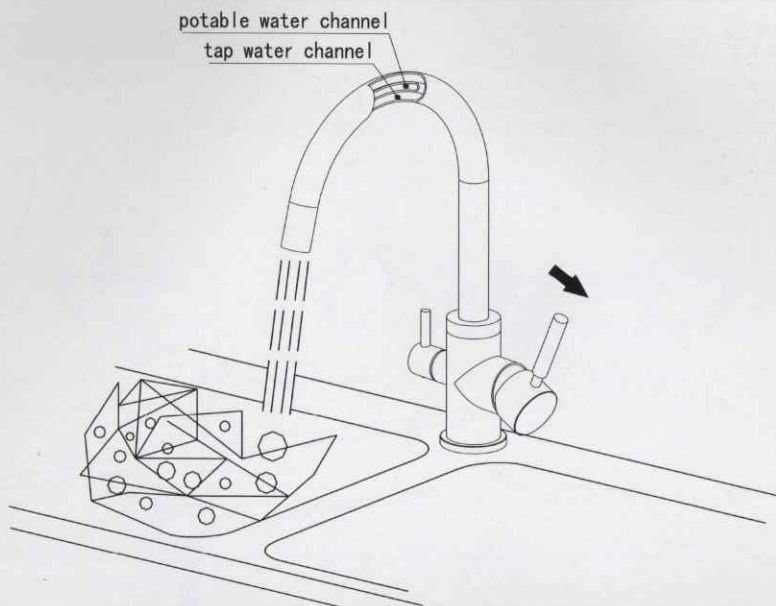

Step ⑪

