

FICHE TECHNIQUE/ TECHNICAL DATA

Appareils domestique/ Domestic equipment ALKA FLOW

Ref.	Descripción / Description
RO1895	Équipement à flux direct Alka Flow 800 GPD Direct flow equipment Alka Flow 800 GPD

Données techniques :

- Débit de production : 2,10 L/min
- Membrane de 800 GPD
- Tension : AC 220V~50Hz
- Puissance : 96W
- Pression d'eau en entrée : 0,1 - 0,4 MPa
- Pression fonctionnement : 0,4 - 0,9 MPa
- Température ambiante : 2°C à 45°C
- Robinet haut de gamme
- Changement de filtres très facile
- Post-filtre alcalin pour réguler le pH
- Dimensions du système :
a. 405 mm | b. 140 mm | c. 440 mm
- Poids du système : 11,08 kg.

Features:

- Production: 2,10 L/min.
- 800 GPD membrane.
- Voltage: AC 220V~50Hz
- Power: 96W
- Inlet water pressure: 0.1-0.4 MPa
- Working pressure: 0.4-0.9 MPa
- Ambient temperature: 2 oC - 45 oC
- High quality faucet.
- Easy filter replacement.
- Alkaline post-filter for pH regulation.
- Equipment dimensions:
a. 405 mm | b. 140 mm | c. 440 mm
- Equipment weight: 11,08 kg.

 Membrane ECO de 800 GPD
ECO 800 GDP membrane


 Haute production
High production

 Post-filtre alcalin pour réguler le pH
Alkaline post-filter for pH regulation

 Changement de filtres en moins de 30 secondes.
Filter change in less than 30s.

 Reminéralise l'eau
Remineralizes water

 Équipement très silencieux
Very quiet equipment

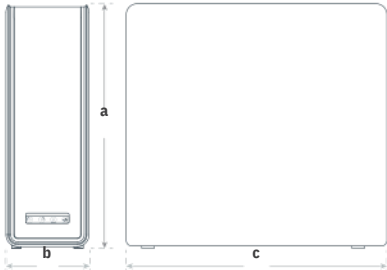

Dimensions approximatives en mm.
Approximate dimensions in mm.

MEMBRANE ET FILTRE / MEMBRANE AND FILTER

Ref.	Description / Description
RO4149	Filtre encapsulé PCB Alka Flow Alka Flow PCB encapsulated filter
RO415	Membrane encapsulée d'osmose inverse 800 GPD Alka Flow Encapsulated reverse osmosis membrane 800 GPD Alka Flow
RO4151	Filtre encapsulé CB+ALK Alka Flow Alka Flow CB+ALK encapsulated filter

